



### Features:

- Wide range of ratings from 25A to 200A.
- Superior Ingress Protection, rated to IP67 & IP69K.
- Designed for harsh applications to 30VDC.
- Optional LED tripID version for open circuits.
- Wide bracket version available in natural or black.
- Circuit breaker made in USA. Subassembly made in Australia.

### Auto Reset

#### Natural Bracket

Part Number	Part Number	Ampere Rating
19A-P21-N-025	19M-P21-B-025	25A
19A-P21-N-030	19M-P21-B-030	30A
19A-P21-N-035	19M-P21-B-035	35A
19A-P21-N-040	19M-P21-B-040	40A
19A-P21-N-045	19M-P21-B-045	45A
19A-P21-N-050	19M-P21-B-050	50A
19A-P21-N-060	19M-P21-B-060	60A
19A-P21-N-070	19M-P21-B-070	70A
19A-P21-N-080	19M-P21-B-080	80A
19A-P21-N-090	19M-P21-B-090	90A
19A-P21-N-100	19M-P21-B-100	100A
19A-P21-N-105	19M-P21-B-105	105A
19A-P21-N-120	19M-P21-B-120	120A
19A-P21-N-135	19M-P21-B-135	135A
19A-P21-N-150	19M-P21-B-150	150A
19A-P21-N-175	19M-P21-B-175	175A
19A-P21-N-200	19M-P21-B-200	200A
19A-P21-N-175	19M-P21-B-175	175A
19A-P21-N-200	19M-P21-B-200	200A

### Manual Reset

#### Natural Bracket

Part Number	Part Number	Ampere Rating
19A-P21-N-025	19M-P21-B-025	25A
19A-P21-N-030	19M-P21-B-030	30A
19A-P21-N-035	19M-P21-B-035	35A
19A-P21-N-040	19M-P21-B-040	40A
19A-P21-N-045	19M-P21-B-045	45A
19A-P21-N-050	19M-P21-B-050	50A
19A-P21-N-060	19M-P21-B-060	60A
19A-P21-N-070	19M-P21-B-070	70A
19A-P21-N-080	19M-P21-B-080	80A
19A-P21-N-090	19M-P21-B-090	90A
19A-P21-N-100	19M-P21-B-100	100A
19A-P21-N-105	19M-P21-B-105	105A
19A-P21-N-120	19M-P21-B-120	120A
19A-P21-N-135	19M-P21-B-135	135A
19A-P21-N-150	19M-P21-B-150	150A
19A-P21-N-175	19M-P21-B-175	175A
19A-P21-N-200	19M-P21-B-200	200A
19A-P21-N-175	19M-P21-B-175	175A
19A-P21-N-200	19M-P21-B-200	200A

**Voltage:** 30VDC

**I.R. (25A - 150A):** 2.5kA at 14VDC, 1.5kA at 28VDC

**I.R. (175A - 200A):** 2.5kA at 30VDC

**Auto Reset Stocked Version:** No indicator.

**Auto Reset Indent Options:** Red LED or Clear LED Indicator.

**Manual Reset Stocked Version:** Red Button.

**Manual Reset Indent Options:** Red LED or Clear LED Button.

All manual reset buttons feature a white ampere marking.

**Mounting Plate:** Natural finish standard, black finish optional.


**Threaded Studs:** 1/4"-28 (12.5mm long), includes 1/4" stainless steel sems nuts.

**Housing:** UL 94-V0 rated black thermoplastic.

**Operating Temp:** -40 deg. C to 85 deg. C

**Pack Size:** 1pc stock lines (36pcs non stock lines).

**Approvals:** SAE J1625, SAE J1171, ABYCE-11, UL1077, Mil-STD-202 (101, 106, 213), Mil-STD-204.

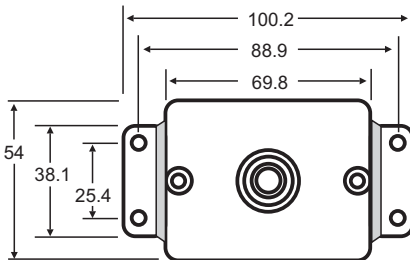

Dimensions in MM



**19M-P21-B-xxx Series  
Manual Reset TIII**  
Wide Mounting Bracket  
Natural Finish




**19M-P21-B-xxx Series  
Manual Reset TIII**  
Wide Mounting Bracket  
Black Finish Option



**19A-P21-N-xxx Series  
Automatic Reset T1**  
Wide Mounting Bracket  
Natural Finish

### Rear View

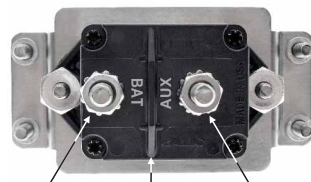

Battery 1/4"-28 Input Stud    Stud Barrier    Auxiliary 1/4"-28 Output Stud

CIRCUIT BREAKERS