

STUD JUNCTION TERMINAL BLOCKS #10-32

Bussmann

Part Number	Nbr. of Positions	Dimensions in MM		
		A	B	C
C5237-1	1	50.8	31.7	-
C5237-2	2	66.7	47.5	15.9
C5237-3	3	82.5	63.4	31.7
C5237-4	4	98.4	79.4	47.5
C5237-6	6	130.8	111.1	79.4
C5237-8	8	161.9	142.9	111.1
C5237-10	10	193.7	174.6	142.9
C5237-12	12	225.4	206.4	174.6

C5237
10-32 Stud



Rating & Voltage: 30A at 600V (CSA)
30A at 300V (UL)

Body: Black Thermoplastic

Studs: Yellow zinc plated brass. # 10-32 threaded studs on 0.625" (15.9mm) centers. Studs feature a "dog point" to guide nut onto thread.

Torque Rating: 2.8Nm max.


Hardware: Nuts & washers included.

Temperature Rating: 120°C


Features: Numbers & arrows molded on top of barriers to indicate terminals.

Notes: Extended range also available contact sales.

Approvals:

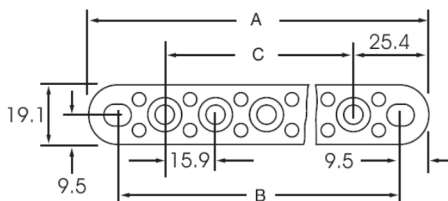

Mounting holes
7.14 x 9.52 slot



Dimensions in MM

RELATED PRODUCTS:



Busbar 2-12 Poles
(Contact Sales)




Stud Cover
(Contact Sales)

STUD JUNCTION TERMINAL BLOCKS #10-24


Bussmann

Part Number	Nbr. of Positions	Dimensions in MM		
		A	B	C
C4559-2	2	76.2	57.1	19.0
C4559-3	3	95.2	76.2	36.1
C4559-4	4	114.3	95.2	57.1
C4559-5	5	133.3	114.3	76.2
C4559-6	6	152.4	133.3	95.2
C4559-8	8	190.5	171.4	133.3
C4559-10	10	228.6	209.5	171.4
C4559-12	12	266.7	247.6	209.5

C4559
10-24 Stud

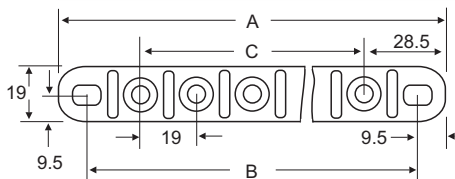

Mounting holes
7.14 x 9.52 slot



Dimensions in MM

Rating & Voltage: 30A at 600V

Body: Black Thermoplastic

Studs: Zinc plated steel. # 10-24 threaded studs on 0.75" (19mm) centers. Studs feature a "dog point" to guide nut onto thread.

Torque Rating: 2.7Nm max.

Options: Nuts & washers included.

Temperature Rating: 120°C

Features: Numbers & arrows molded on top of barriers to indicate terminals.

Approvals:

RELATED PRODUCTS:



Busbar 2-12 Poles
(Contact Sales)



Stud Cover
(Contact Sales)