

MAXI FUSE HOLDER CHASSIS MOUNT




Part Number	Fuse Holder Kits Include:
152001KIT1	1 x Fuse holder body, 1 x clear cover, 2 x Screws, 4 x washers & 2 x terminals (2.5 - 6mm ²)
152001KIT2	1 x Fuse holder body, 1 x clear cover, 2 x Screws, 4 x washers & 2 x terminals (5 - 10mm ²)

Part Number	Individual Component Ordering
152001	Maxi fuse holder black body (01520001)
152900	Protective clear fuse holder cover (01520900)
913-550	M5 x 8 Screw, split washer and flat washer
913-653	Ring tongue terminal, 2.5 - 6.0mm ² (#12-10AWG)*
913-654	Ring tongue terminal, 5.0 - 10mm ² (#10-8AWG)*




Rating: 60A **Voltage:** 32VDC
Terminals: Copper alloy **Cover:** Translucent thermoplastic
Body: Thermoplastic (UL 94HB), **Ignition Protection:** V-2
Feature: Only 2 fuse blocks may be ganged together with a maximum fuse rating of 50A per block.
Notes: This product will only accept original Littelfuse Maxi blade fuses (299 / 999 series). Fuse is not included.
 *It is recommended that cross linked polyethelene (GLX) insulated wire be used. Contact sales for more information.

Clear Holder Cover



Dimensions in MM

Fuse Holder Body



MAXI FUSE IN-LINE HOLDER SPLASH PROOF


Part Number	Description
HXX	Fuse holder with red cable

Rating: 60A **Voltage:** 32VDC
Wire: 2 x 127mm leads of 13mm² #6AWG red.
Feature: Firewall mounting hole permits two or more holders to be mounted together.
 Cover comes with a removable strap.
Notes: Fuse is not included.
Approvals:



Bussmann

NEW

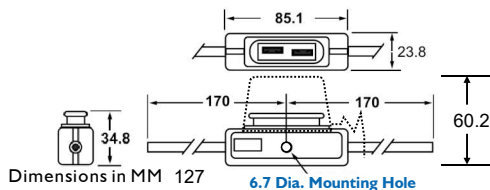


MAXI FUSE IN-LINE HOLDERS SPLASH PROOF

Part Number	Description	A	B	C
MFHC	Fuse holder with black cover	150	79	17.8
MFHCLR6	Fuse holder with clear cover	127	94	24

Rating: 60A **Voltage:** 32VDC
Wire: 2 x leads of 13mm² #6AWG red. **Body Material:** PVC.
Notes: Cover permits use in harsh under hood environments. Clear cover allows LED Maxi fuses to be clearly seen.

RELATED PRODUCTS



Dimensions in MM

PROLEC

IP67



MFHC



MFHCLR6