

MAXI FUSE & MAXI RELAY - SEALED PDM KIT

GEP
POWER PRODUCTS

NEW
IP66

This power distribution module kit provides compact, durable & sealed solution for the transportation market. Modules can be interlocked together or interlocked with other GEP PDM-R series modules. Kit includes module, cover, tether, terminals, cable seals and terminal position assurance (TPA's). Maxi Fuses & ISO MAXI relays are sold separately.

This module kit is designed to fit;

- 2 x MAXI fuses.
- 2 x Maxi ISO Relays (4 pin)

Voltage Rating: 32VDC

Terminal Rating: varies by terminal & connected cable.

Temperature Rating: -40°C to +125°C.

Housing: Black thermoplastic. **Seal:** Silicone, blue.

Mounting: Top mount with insert. Side mount also available.

Cable Seals: Please check the overall diameter of your cable before ordering cable seals. Silicone material UL94-V0.

Cavity Plugs: Required to fill unused output cavities for ingress protection. Silicone material.

Ingress Protection Rating: IP66.

Components: Fuses & relays are not included and sold separately.

Approvals: [RoHS](#)



PDMKIT-R3C

Fuses & Relays not included

Part Number	Description
PDMKIT-R3C	1 x PDM Kit with Cover, Terminals, Cable Seals & TPA's

KIT INCLUDES:

Part Number	Description
PDM-R3CCI	1 x PDM 2 x Fuse / 2 x Relay Housing with Cover & Seal
PDM-TT3	2 x TPA Terminal Position Assurance for Relays
PDM-TT4	2 x TPA Terminal Position Assurance for Fuses
PDM-SCT	1 x PDM Tether Black
I2052455	4 x Terminal I - 2mm ² (Maxi Relay 6.3mm)
I5324995	4 x Cable Seal 2.0 - 2.9mm dia. (Maxi Relay 6.3mm)
I5327010	4 x Terminal 4 - 6mm ² (Maxi Relay 9.5mm)
I5327126	4 x Cable Seal 3.4 - 4.3mm dia. (Maxi Relay 9.5mm)
28225306710	4 x Terminal 8 - 10mm ² (Maxi Fuse 8mm)
PDM-TWS-LS	4 x Cable Seal 5.8 - 6.6mm dia. (Maxi Fuse 8mm)

Note: Full range of terminals & cable seals on page 3.



Module pictured with TPA's fitted and Maxi Fuses and Maxi Relays installed.



RELATED PRODUCTS:



Maxi Fuses



**Maxi ISO Relays,
12VDC or 24VDC.**



Terminals, Cable Seals & Cavity Plugs
Please refer to page 3 for ordering options.

Datasheet: 9046

PROLEC

Email: info@prolecproducts.com
Web: www.prolecproducts.com

Page: 1

This power distribution module provides compact, durable and a sealed solution for the transportation market. Modules can be interlocked together or interlocked with other GEP PDM-R series modules.

This module is designed to fit;

- 2 x MAXI fuses.
- 2 x Maxi ISO Relays (4 pin)

Voltage Rating: 32VDC

Terminal Rating: varies by terminal & connected cable.

Temperature Rating: -40°C to +125°C.

Housing: Black thermoplastic. **Seal:** Silicone, blue.

Mounting: Top mount with insert. Side mount also available.

Cable Seals: Please check the overall diameter of your cable before ordering cable seals. Silicone material UL94-V0.

Cavity Plugs: Required to fill unused output cavities for ingress protection. Silicone material.

Ingress Protection Rating: IP66.

Components: Fuses, relays, TPA's, terminals, cable seals & cavity plugs are not included and sold separately.

Approvals: [RoHS](#)



PDM-R3CCI

Fuses & Relays not included

Part Number	Description
PDM-R3CCI	PDM 2 x Fuse / 2 x Relay Housing, Cover & Seal
PDM-TT3	TPA Terminal Position Assurance, 2pcs Required
PDM-TT4	TPA Terminal Position Assurance, 2pcs Required
PDM-SCT	PDM Tether Black

Note: All parts are ordered separately.



PDM-TT3

1 piece

PDM-TT4

2 pieces

PDM-TT3

1 piece

Module with TPA's fitted

RELATED PRODUCTS:



Maxi Fuses



**Maxi ISO Relays,
12VDC or 24VDC.**



TPA: PDM-TT3

Secures 4 relay terminals.



TPA: PDM-TT4

Secures 2 fuse terminals.



Terminals, Cable Seals & Cavity Plugs

Please refer for page 3 for ordering options.



TETHER: PDM-SCT

Links Cover with Base
(Fitting help on page 4)



Terminals & Seals for Maxi Fuses.

Maxi Fuse 8mm terminal (2pcs per fuse)

SHORT TERMINALS: Lear Mak8 Plus

Female sealed - Copper



Part Number	Wire (AWG)	Wire (mm ²)	Plating
28469306189	#13 - #11	2.5 - 4.0	Silver Tin
28459306189	#9 - #7	6.0 - 10.0	Silver Tin

LONG TERMINALS: Lear Mak8 Plus

Female sealed - Copper



Part Number	Wire (AWG)	Wire (mm ²)	Plating
28224306710	#13 - #11	2.5 - 4.0	Silver
28225306710	#9 - #7	6.0 - 10.0	Silver
28243306710	#7 - #5	10.0 - 16.0	Silver

SHORT CABLE SEALS:

Silicone, **GEP**



Part Number	Cable Dia. (mm)	Colour
PDM-TWS-S1	2.7 - 3.0	Green
PDM-TWS-S2	3.4 - 3.8	Purple
PDM-TWS-S3	4.0 - 4.5	Orange
PDM-TWS-S4	4.6 - 5.3	Light Blue
PDM-TWS-S5	5.8 - 6.6	Gray

LONG CABLE SEALS:

Silicone, **GEP**



Part Number	Cable Dia. (mm)	Colour
PDM-TWS-L1	2.7 - 3.0	Green
PDM-TWS-L2	3.4 - 3.8	Purple
PDM-TWS-L3	4.0 - 4.5	Orange
PDM-TWS-L4	4.6 - 5.3	Light Blue
PDM-TWS-L5	5.8 - 6.6	Gray
PDM-TWS-L6	6.5 - 7.8	Red

CAVITY PLUG:

Silicone, **GEP**



Part Number
PDM-TWS-P



Terminals & Seals for Maxi ISO Relays.

Maxi ISO Relay 9.5mm terminal (2pcs per relay)

TERMINALS: Delphi Ducon 9.5

Female sealed - CuNiSi / Tin plated



Part Number	Wire (AWG)	Wire (mm ²)
I5327010	#11 - #9	4.0 - 6.0
I0730408	#7	10.0
I5458196	#5	16.0

CABLE SEALS:

Silicone



Part Number	Cable Dia. (mm)	Colour
I5492996	2.20 - 3.00	Blue
I5327126	3.40 - 4.30	Dark Red
I0720983	6.00 - 6.40	Green
I5470809	6.50 - 7.75	Red

CAVITY PLUG:

Silicone



Part Number
I0720907

Maxi ISO Relay 6.3mm terminals (2pcs per relay)

TERMINALS: Delphi Metri-Pack 630

Female sealed - Tin Brass / Tin plated



Part Number	Wire (AWG)	Wire (mm ²)
I2052457	#20 - #18	0.5 - 0.8
I2052455	#16 - #14	1.0 - 2.0
I2052456	#12 - #10	3.0 - 5.0

CABLE SEALS:

Silicone




Part Number	Cable Dia. (mm)	Colour
I5324997	1.60 - 2.40	Tan
I5324995	2.00 - 2.90	Dark Red
I5324994	2.80 - 3.80	Grey
I5324996	3.60 - 4.50	Blue

CAVITY PLUG:


Silicone






Part Number
I2059255

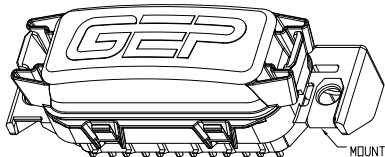

MOUNTING INSERT
PDM-R3XXX
M6 X 1.0



**Terminal Numbering
(Rear of Unit)**

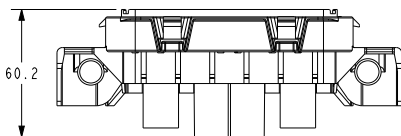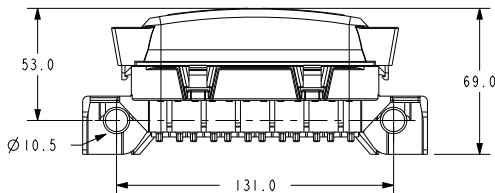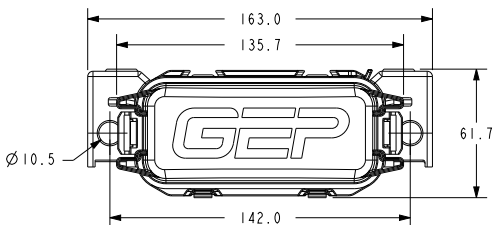

Dimensions in MM




Tether Installation Instructions




Scan this
QR Code



QR Code: 8011



Ganged Units

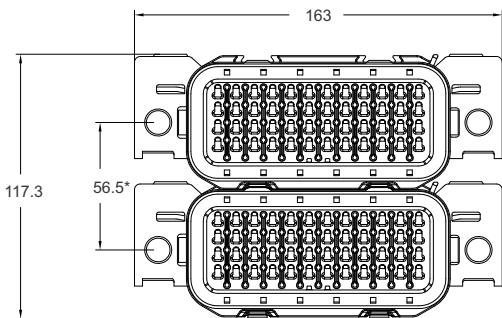

Units are Gangable

*Dimension increases by 56.5mm for each additional module