

CLASS T, EV & EVSE BOLTED FUSE BLOCKS MODULAR




NEW

1500V

Features

- Modular design reduces inventory requirements.
- Supplied with nut and belleville washer.
- 200kA short-circuit withstand rating.

Part Number	Ampere Rating	Terminal Stud Size (Metric)	Suggested Stud Torque
LSCRI01	400A	1/4"-20 (6.35mm)	7.6-9.3 Nm
LSCRI02	800A	3/8"-16 (9.52mm)	23.4-28.6 Nm
LSCRI03	1200A	1/2"-13 (12.7mm)	30.5-37.3 Nm



Voltage: 700VAC / 1500VDC

Insulator Material: Thermoplastic (125°C Max)

Terminal Material: Steel, Zinc Plated.

Ordering Information: Sold as single blocks. (order 2 blocks per fuse).

Notes: Fuse not included.

Approvals:  



LSCRI01



LSCRI02





LSCRI03




FUSE COMPATIBILITY REFERENCE

Fuse Series	Amp Range	LSCR101	LSCR102	LSCR103
250GG	75A - 150A	X		
250GG	160A - 200A		X	
4-GG	630A - 800A			X
4-NB	630A - 1200A			X
4-SB	630A - 1200A			X
AE5	50A - 400A	X		
AE7	60A - 150A	X		
AE7	175A - 600A		X	
AEX	70A - 100A	X		
AEX	125A - 600A		X	
ANL	35A - 400A	X		
ANN	10A - 400A	X		
DFJ	70A - 200A	X		
DFJ	225A - 400A		X	
DFJ	450A - 600A			X
EET	75A - 160A	X		
ET	15A - 80A	X		
EV20	50A - 150A	X		
EV25	100A - 250A	X		
EV30	200A - 400A	X		
FBT	35A - 500A		X	
FE	35A - 100A	X		
FEE	100A - 200A	X		
FM	180A - 350A		X	
FMM	400A - 700A		X	
FWA	70A - 400A	X		
FWA	500A - 800A		X	
FWH	35A - 200A	X		
FWH	225A - 600A		X	
FWH	700A - 1200A			X
FWJ	35A - 100A	X		
FWJ	125A - 400A		X	
FWJ	500A - 1200A			X
FWP	5A - 100A	X		
FWP	125A - 400A		X	
FWP	450A - 800A			X
FWX	35A - 200A	X		
FWX	225A - 800A		X	
JJN	70A - 200A	X		
JJN	225A - 600A		X	
JJN	700A - 1200A			X
JJS	70A - 200A	X		
JJS	225A - 600A		X	
JJS	700A - 800A			X
JKS	70A - 200A	X		
JKS	225A - 400A		X	
JKS	450A - 600A			X
KRPC	601A - 1200A			X
LET	10A - 160A	X		
LETa	180A	X		
LMMT	400A - 800A		X	
LMT	160A - 450A		X	
LPj..SP	70A - 200A	X		
LPj..SP	225A - 400A		X	
LPj..SP	450A - 600A			X
MMT	180A - 710A		X	
MT	160A - 355A		X	
PV...ANH1-B	63A - 200A	X		
PV...ANH2-B	160A - 250A		X	
PV...ANH3-B	315A - 400A		X	
TPL/LI7T	70A - 250A	X		
TPL/LI7T	300A - 800A		X	

Not all recommended holders may be suitable for your circuit. Please check the holder specifications are suitable for your fuse.

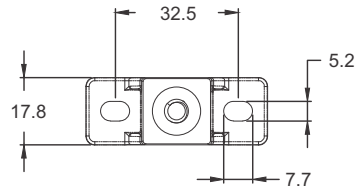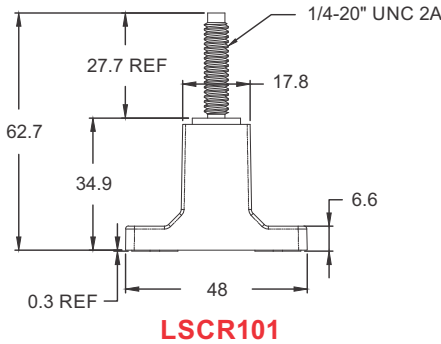

Dimensions in MM

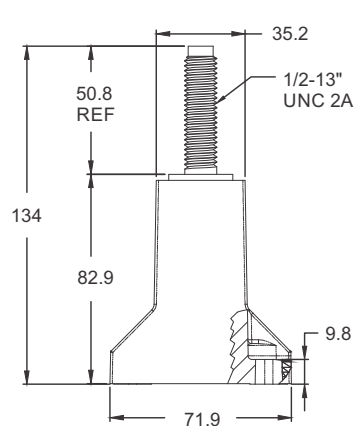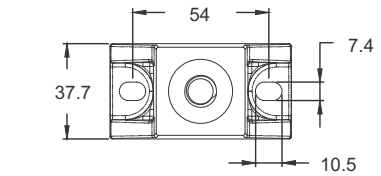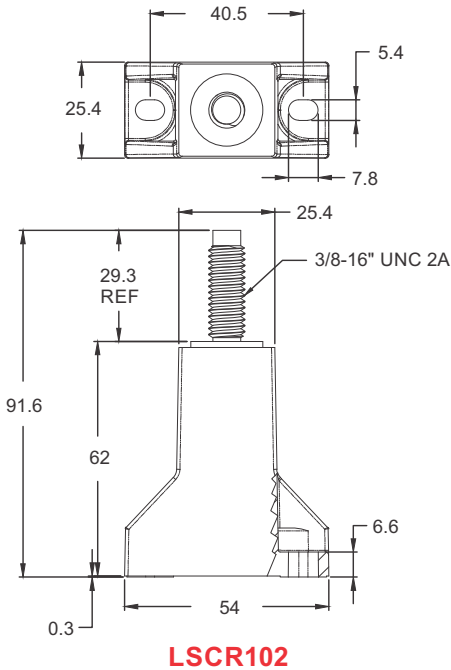

LSCR103